




MB-Type コンデンサ放電・バランス用マルチ取付タイプ (RoHS指令対応品)

■品番構成法 Type descriptions

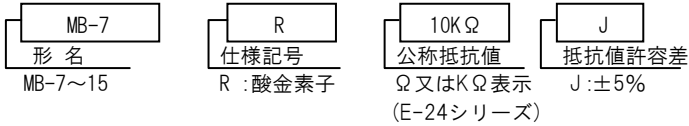


MB-7


MB-10, 15

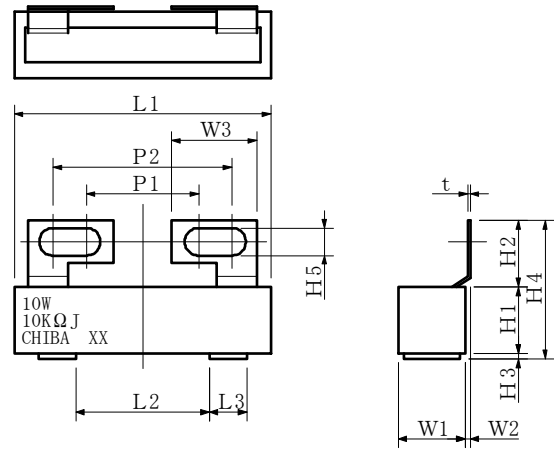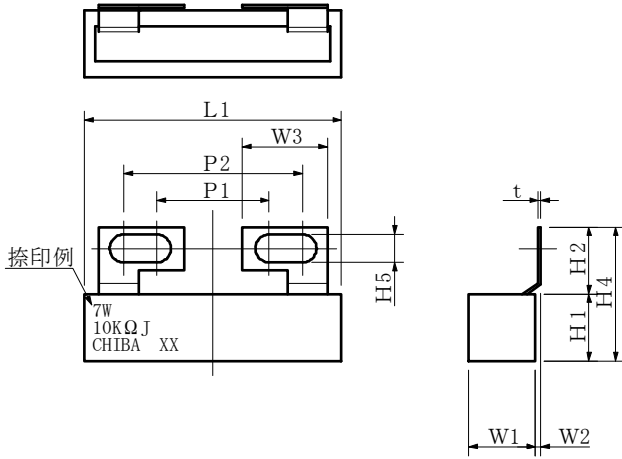

■負荷軽減曲線 Load derating curve

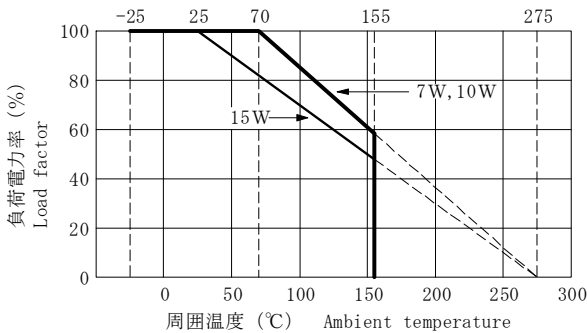

■温度上昇曲線 Temperature rise curve (参考)

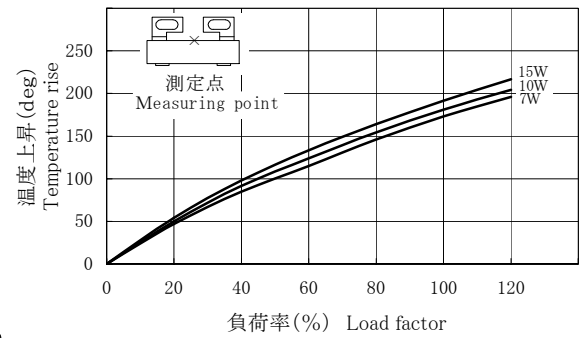

■寸法及び抵抗値範囲 Dimensions & Resistance range

形名 Style	定格電力 (W) Power rating	抵抗値範囲(Ω) Resistance range 酸化(R) Metal oxid	寸法 (mm) Dimensions														重量 (g) Weight
			L1	L2	L3 ±1	P1	P2	W1	W2	W3	H1	H2	H3	H4	H5	t	
MB-7	7	1.5K~56K	48.0±1.5	—	—	21	33.5±0.5	9.5±1.0	2	16	9.5±1.0	14.5	—	24	5.2	0.5	11.5
MB-10	10	1.5K~45K	48.0±1.5	25.0±1.0	7.0	21	33.5±0.5	12.5±1.2	1	16	12.5±1.2	12.5	1	26	5.2	0.5	20.0
MB-15	15	1.5K~36K	48.0±1.5	25.0±1.0	7.0	21	33.5±0.5	12.5±1.2	1	16	12.5±1.2	12.5	1	26	5.2	0.5	20.0